

Flexibility, innovation and safety
for your work

COUNTERBALANCED CRANES WITH FIX JIB ARM - MANUAL OR ELECTRIC CONTROLLED JIB EXTENSION - LARGE CAPACITY

A complete range of counterbalanced cranes with manual traction, , with a maximum capacity up to **1.000 kg and outreach up to 2.000 mm**. Hydraulic lever controlled fast lift double action pump or electric controlled. They represent the most cost-effective and flexible solution for lifting and transporting loads in several applications such as machining centers and machine tools, delivery to assembly lines, assembly operations, goods handling. Thanks to their minimum frontal footprint of just 800mm they can be moved in narrow lanes and spaces and are easily maneuverable even at full load without efforts. All components are made in Italy to ensure the highest construction quality and the absence of defects.



The hydraulic system is equipped with a lock valve that prevents the load from falling in case of accidental breakage of the pipes and a rough valve that prevents overloading of the crane.

Tiller arm equipped with gas spring and double wheels Ø 200 mm with ball bearings and braking system; 2 fixed front wheels Ø 250 mm with bearings to make it easy to move.

The frame is made of painted steel and is equipped at the base with 2 useful forklift supports to lift and transport the crane safely on long distances. 360 ° swivel hook type.

**CERTIFICATION
AND
COMPLIANCE
WITH
REGULATIONS
FOR THE
PROTECTION
AND SAFETY IN
THE
WORKPLACE**

Flexlifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434

email: info@flexlifting.com website: www.flexlifting.com

GZ1000

CAPACITY 1000 KG
COUNTERBALANCED CRANE FIX JIB ARM - HYDRAULIC LEVER CONTROLLED
FAST LIFT DOUBLE ACTION PUMP - FINE CONTROL DESCENT KNOB



Technical data	UM	GZ1000
Weight	[kg]	1150
Max capacity	[kg]	1000
Max pressure	[bar]	160
Tank capacity	[Liters]	3
Cylinder stroke	[mm]	550

CAPACITY AND DIMENSIONS WITH STANDARD JIB ARM		
POS.	Length	Capacity
	[mm]	[kg]
1	650	1000
2	850	835
3	1050	670
4	1250	500

CAPACITY WITH OPTIONAL EXTENDED JIB ARM		
POS.	Length	Capacity
	[mm]	[kg]
1	1400	450
2	1600	390
3	1800	325
4	2000	275

Model GZ1000 is equipped with a lever controlled fast lift and lightweight double action pump .

The control descent knob make it possible to adjust the descent speed. The arm is extendable in 4 positions and an optional arm extension is available to get a maximum outreach of 2000 mm.

Model GZ1000 being a crane with manual lifting does not require a third-party certification according to current legislation or obligation of periodic checks.

800mm front footprint



Detail of the hand pump with rod housing support and knurled knob




GZ1000


TECHNICAL DRAWINGS, DIMENSIONS AND CAPACITIES

The most cost effective and flexible crane

STANDARD EXTENSION

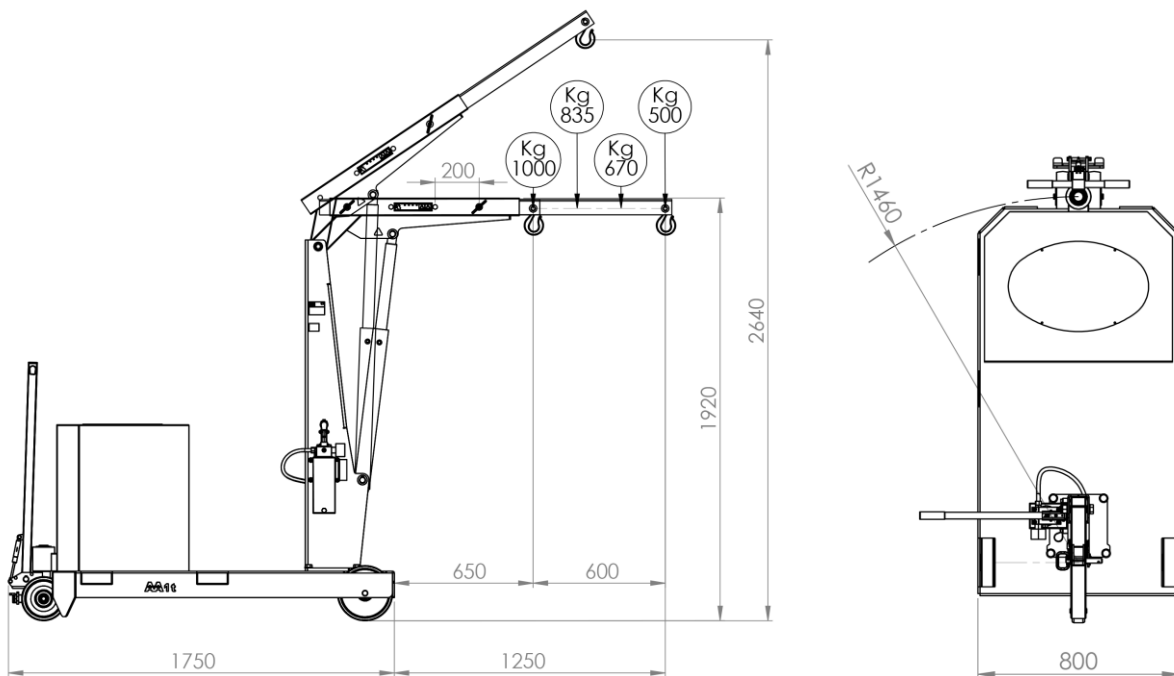

OPTIONAL EXTENSION

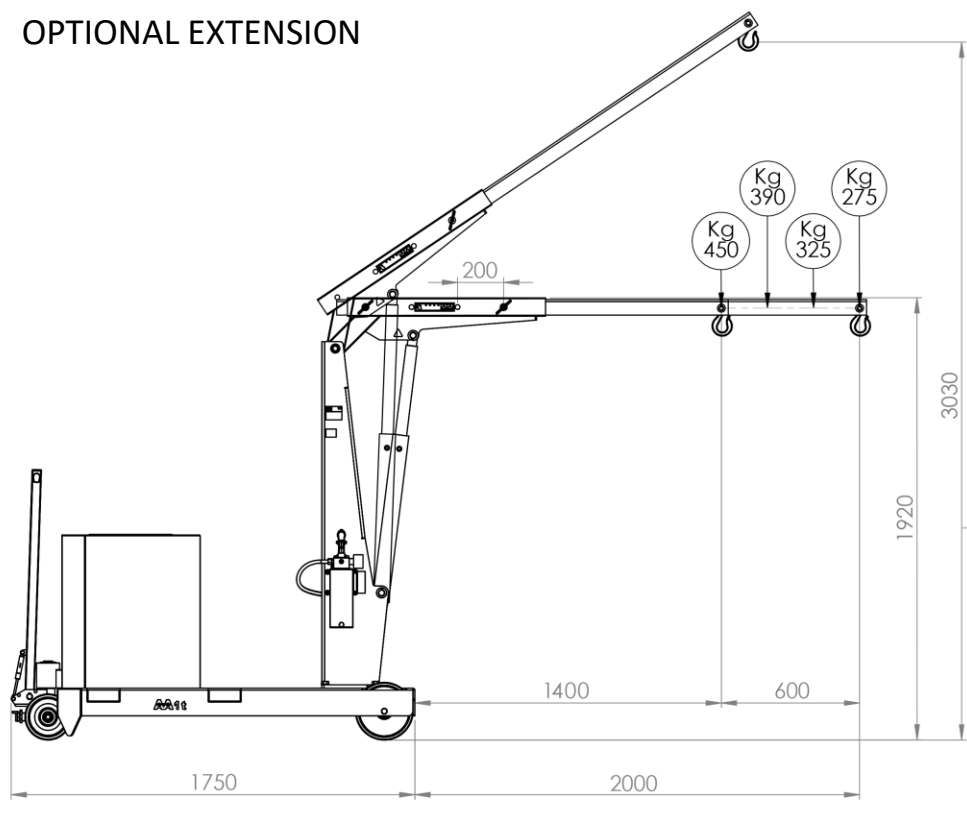

For an
unlimited
number of
applications.

No obligation
to carry out
periodic
verification.

Flexlifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com website: www.flexlifting.com

GZ1000B

CAPACITY 1000 KG
COUNTERBALANCED CRANE - FIX JIB ARM - SINGLE SPEED POWERED
LIFT/LOWER JIB ARM



CAPACITY AND DIMENSIONS WITH STANDARD JIB ARM

POS.	Length	Capacity
	[mm]	[kg]
1	650	1000
2	850	835
3	1050	670
4	1250	500

CAPACITY WITH OPTIONAL EXTENDED JIB ARM

POS.	Length	Capacity
	[mm]	[kg]
1	1400	450
2	1600	390
3	1800	325
4	2000	275

Technical data	UM	GZ1000B
Weight	[kg]	1190
Max capacity	[kg]	1000
Max pressure	[bar]	160
Tank capacity	[Liters]	3
Cylinder stroke	[mm]	550

Nr 1 Batteria	[V]	12
	[A]	80
Caricabatteria	[V]	220
	[A]	12

Model GZ1000B is equipped with a single speed lift/lower system controlled by pendant push button with emergency stop. Built-in high-frequency charger. Charge level indicator. Battery 12V 80A. The arm is extendable in 4 positions and an optional arm extension is available to get a maximum outreach of 2000 mm.




GZ1000B


TECHNICAL DRAWINGS, DIMENSIONS AND CAPACITIES

Recommended for lifting operations that do not require an accurate load positioning in the descent phase

STANDARD EXTENSION

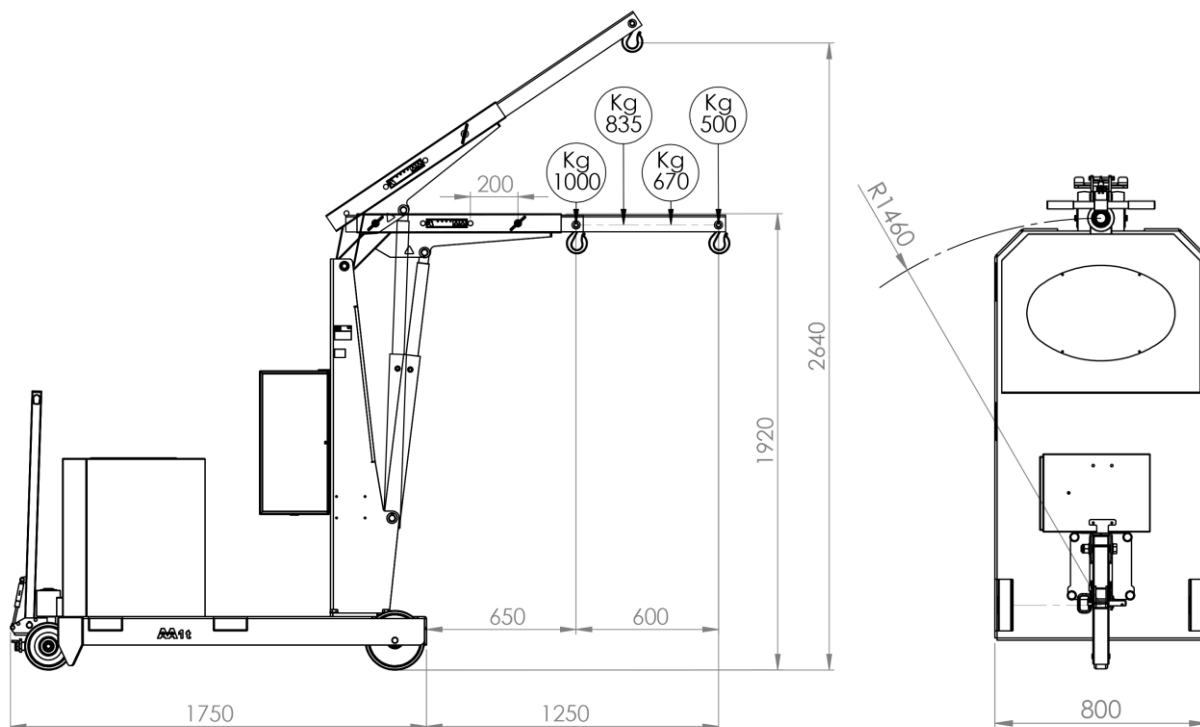

OPTIONAL EXTENSION

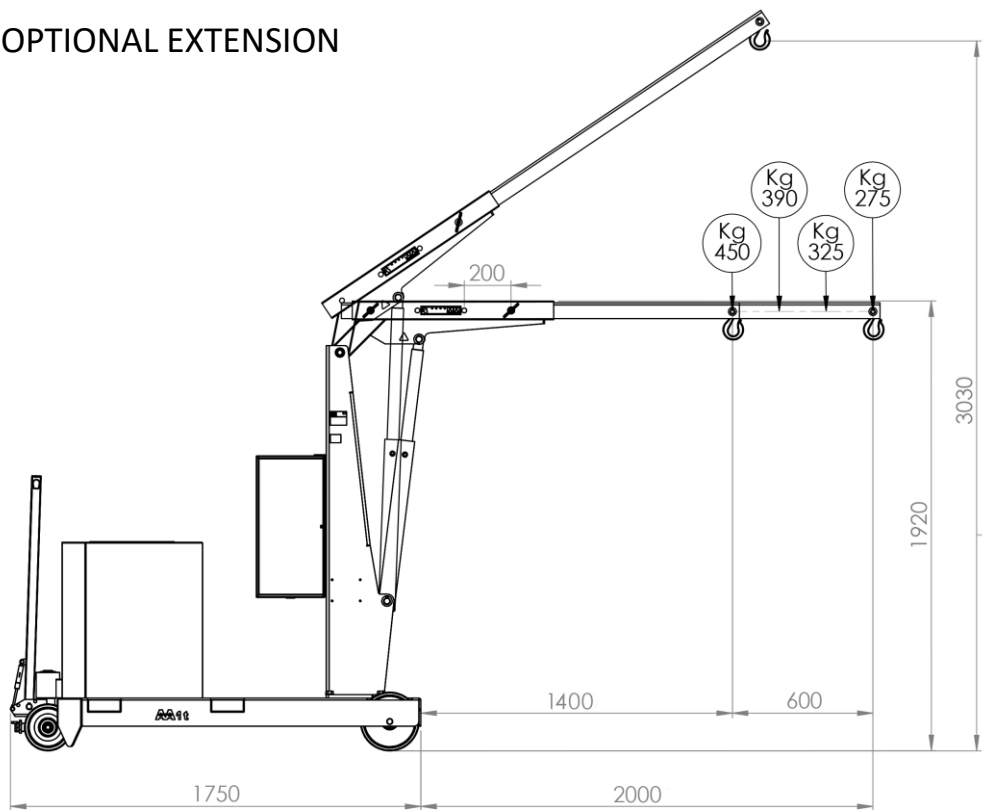


Suitable for
lifting
operations in
logistics

GZ1000BP

CAPACITY 1000 KG

COUNTERBALANCED CRANE - FIX JIB ARM - SINGLE SPEED POWERED LIFT
JIB ARM - LOWER CONTROLLED BY PENDANT PROGRESSIVE LEVER

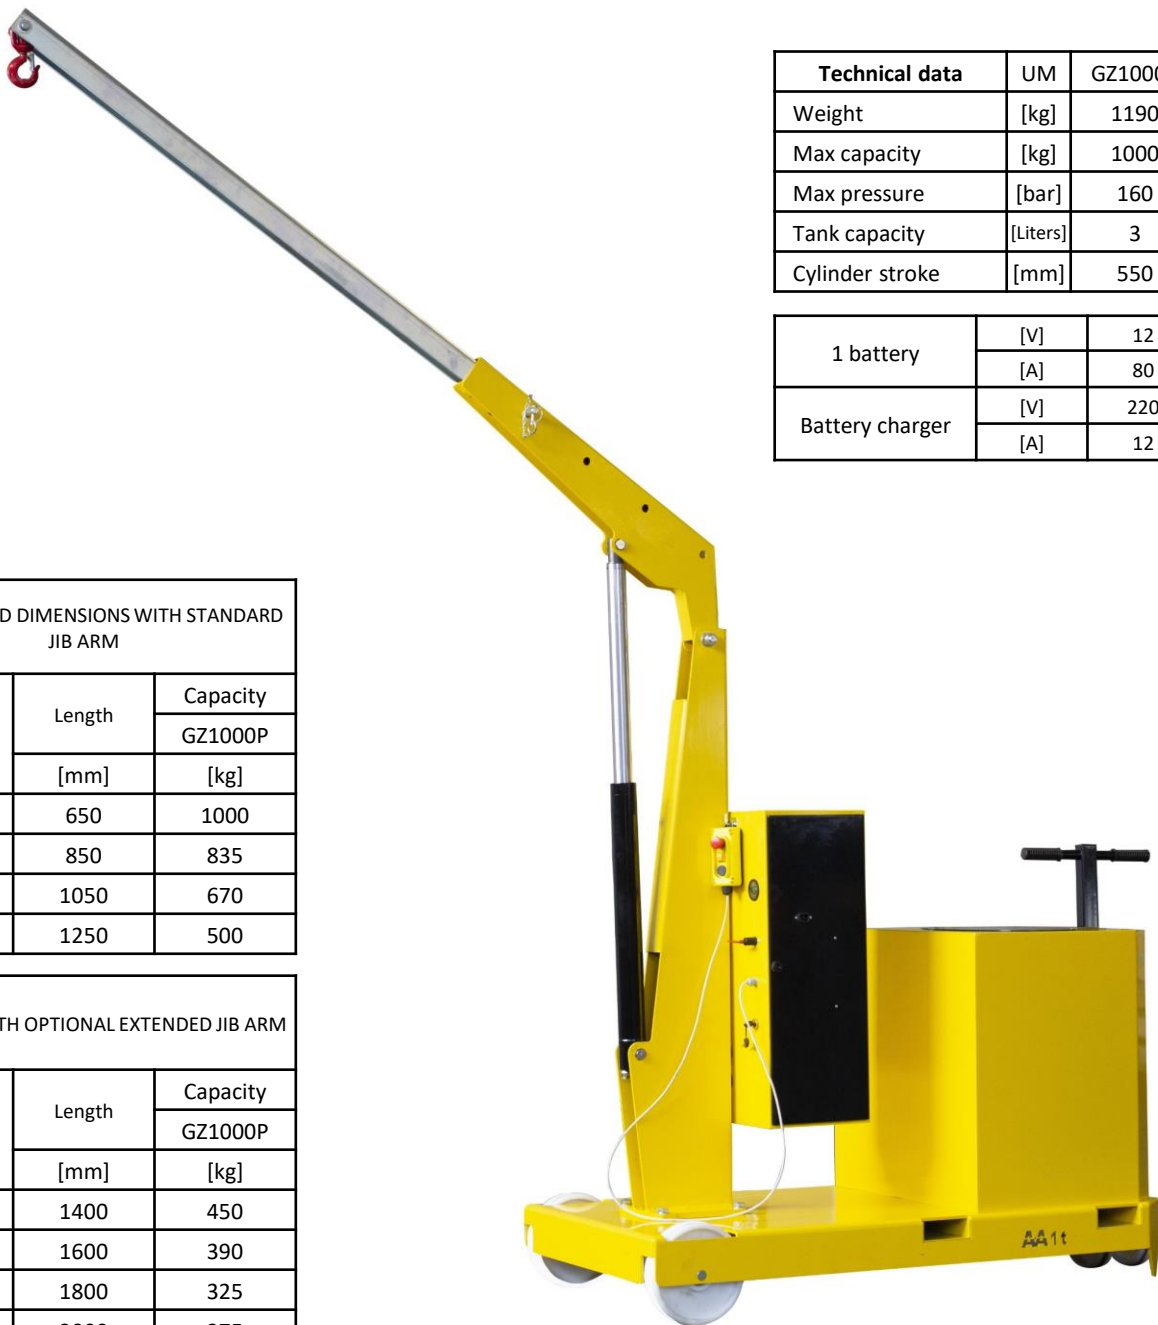

Technical data	UM	GZ1000P
Weight	[kg]	1190
Max capacity	[kg]	1000
Max pressure	[bar]	160
Tank capacity	[Liters]	3
Cylinder stroke	[mm]	550

1 battery	[V]	12
	[A]	80
Battery charger	[V]	220
	[A]	12

CAPACITY AND DIMENSIONS WITH STANDARD JIB ARM

POS.	Length	Capacity
	[mm]	[kg]
1	650	1000
2	850	835
3	1050	670
4	1250	500

CAPACITY WITH OPTIONAL EXTENDED JIB ARM

POS.	Length	Capacity
	[mm]	[kg]
1	1400	450
2	1600	390
3	1800	325
4	2000	275

GZ1000BP is equipped with a pendant lever for lifting a load at a single speed and operating a progressive descent . This requirement is indispensable when millimeter accuracy is required during the positioning of the load.

The arm is extendable in 4 positions and an optional arm extension is available to get a maximum outreach of 2000 mm.

Built-in high-frequency charger. Charge level indicator. Battery 12V 80A.




GZ1000BP


TECHNICAL DRAWINGS, DIMENSIONS AND CAPACITIES

Recommended for operations where an accurate load positioning is needed

STANDARD EXTENSION

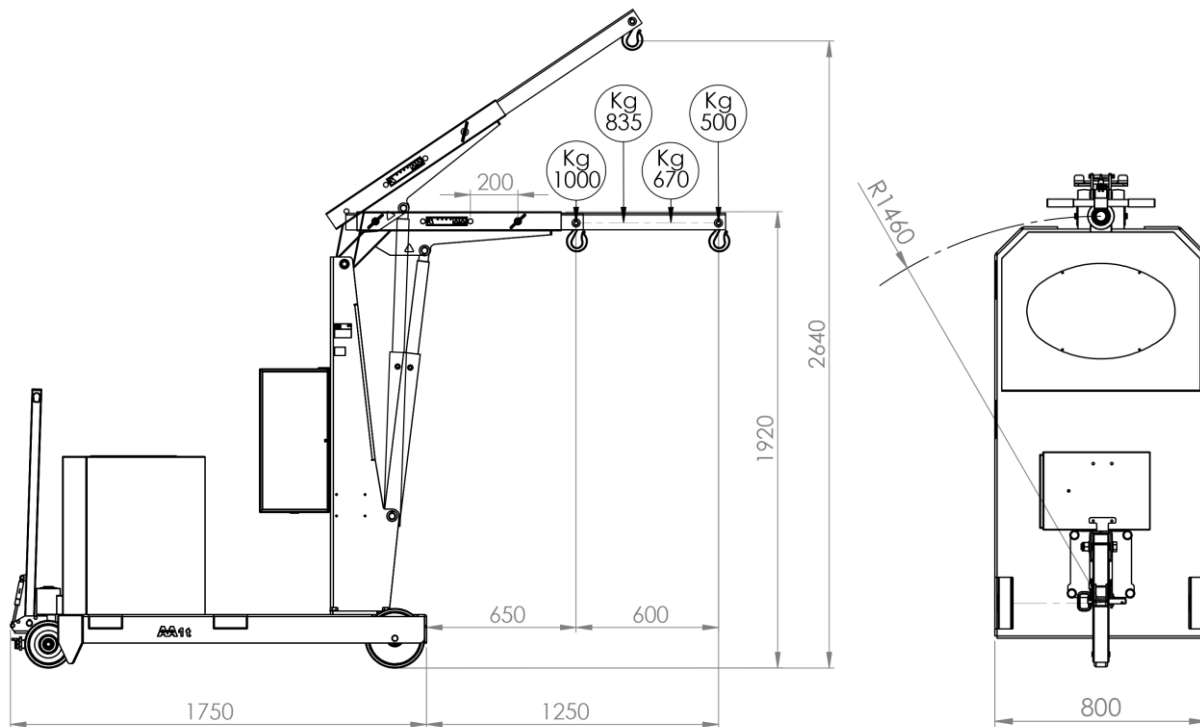


OPTIONAL EXTENSION

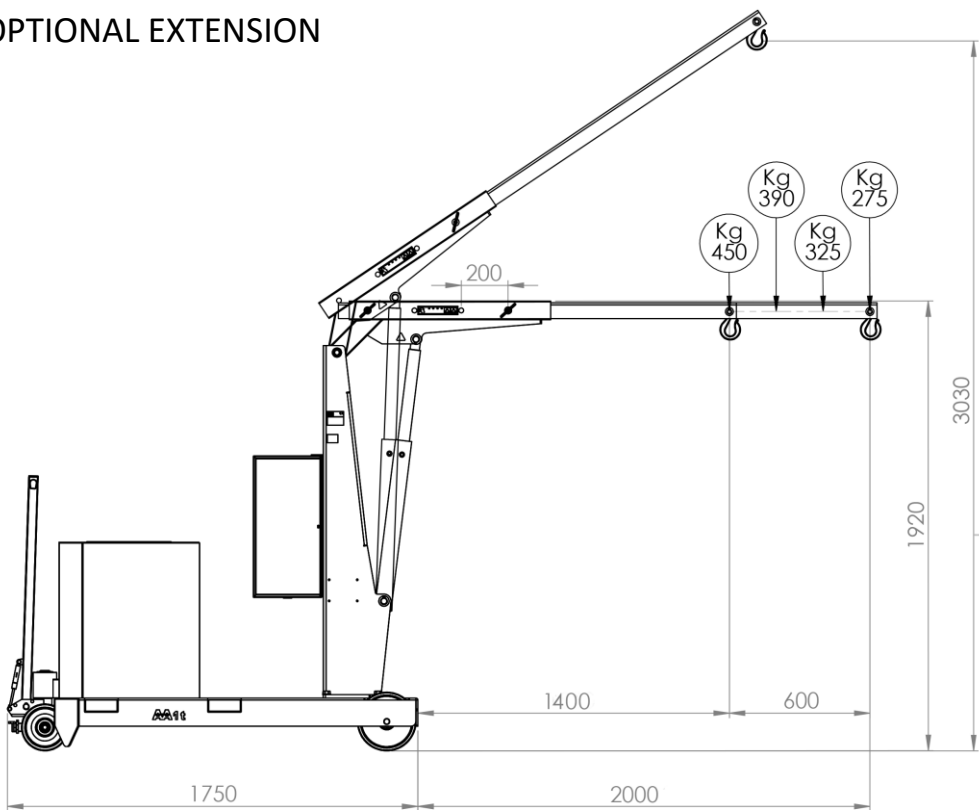

Millimeter accuracy in the positioning of the load in the descent phase

GZ1000BSE

CAPACITY 1000 KG
COUNTERBALANCED CRANE , FIX JIB ARM , POWERED LIFT /LOWER & POWERED EXTEND/RETRACT JIB ARM WITH PROGRESSIVE SPEED

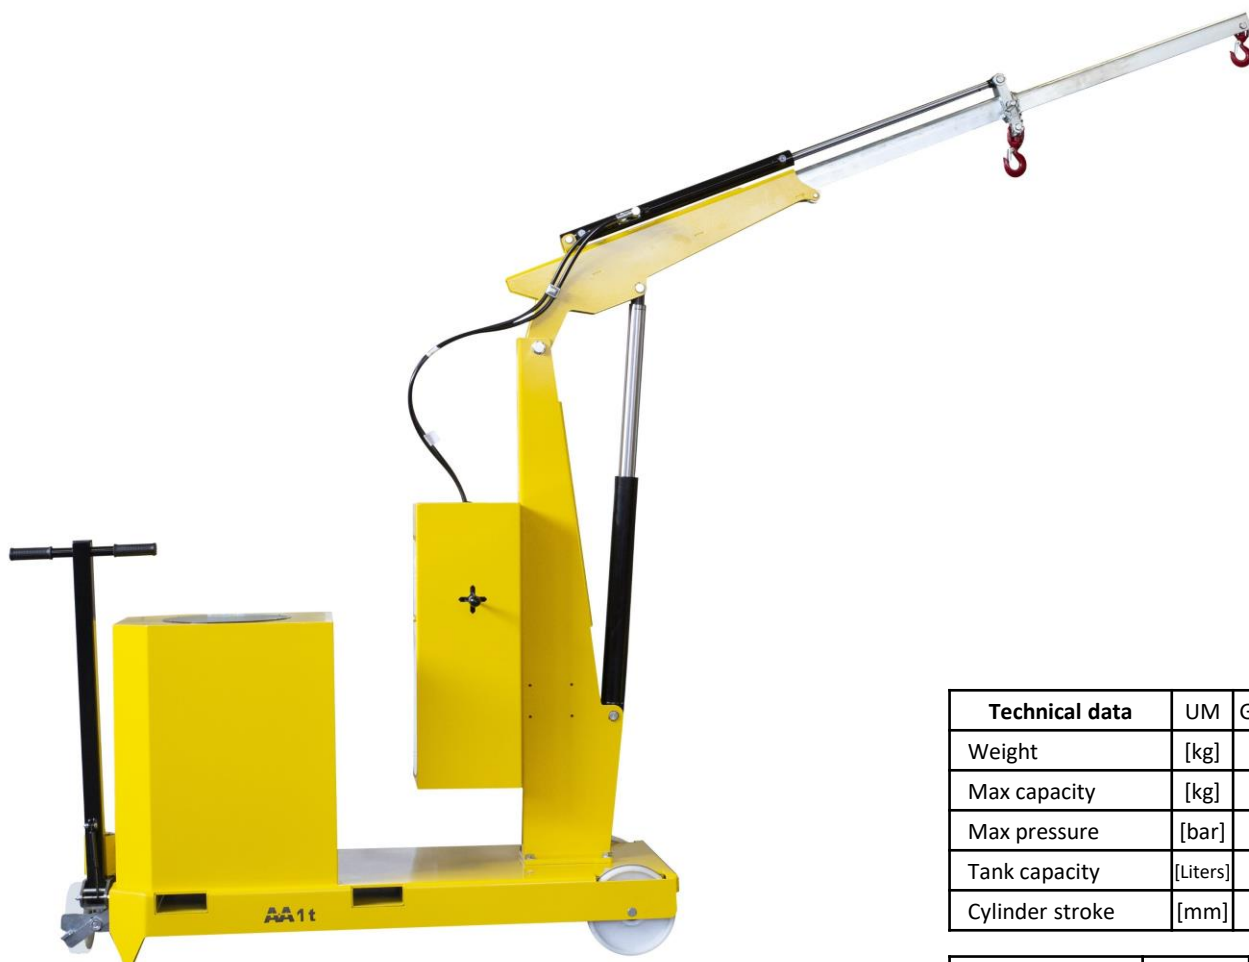

GZ1000BSE is equipped with an electric controlled jib arm. It is equipped with a 4 way fine control lever controls for :

- Lifting the jib arm
- Lowering the jib arm
- Extending the jib arm
- Retracting the jib arm

All movements (arm and extension) are electric controlled, progressive and adjustable by the operator with extreme precision. Controlled descent system with the engine off.

Model GZ1000BSE is the most popular model for awkward placements from the ground onto 3D machines, lathes, over perimeter protections, narrow openings, etc. and in all those applications where there is no space to move the load with a forklift or other large sizes lifting equipment.

Technical data	UM	GZ1000BSE
Weight	[kg]	1195
Max capacity	[kg]	1000
Max pressure	[bar]	160
Tank capacity	[Liters]	3
Cylinder stroke	[mm]	550

1 battery	[V]	12
	[A]	80
Battery charger	[V]	220
	[A]	12

CAPACITY AND DIMENSIONS WITH STANDARD JIB ARM	
Length	Capacity
[mm]	[kg]
from 650 to 1250	from 1000 to 500

CAPACITY WITH OPTIONAL EXTENDED JIB ARM	
Length	Capacity
[mm]	[kg]
from 1400 to 2000	FIX CAPACITY 200



Battery charger



Detail of the 4 way fine control lever

Flexlifting – a brand of AxA Group srl


Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com website: www.flexlifting.com

GZ1000BSE


TECHNICAL DRAWINGS, DIMENSIONS AND CAPACITIES

The right crane for endless applications
and the best performance

STANDARD EXTENSION

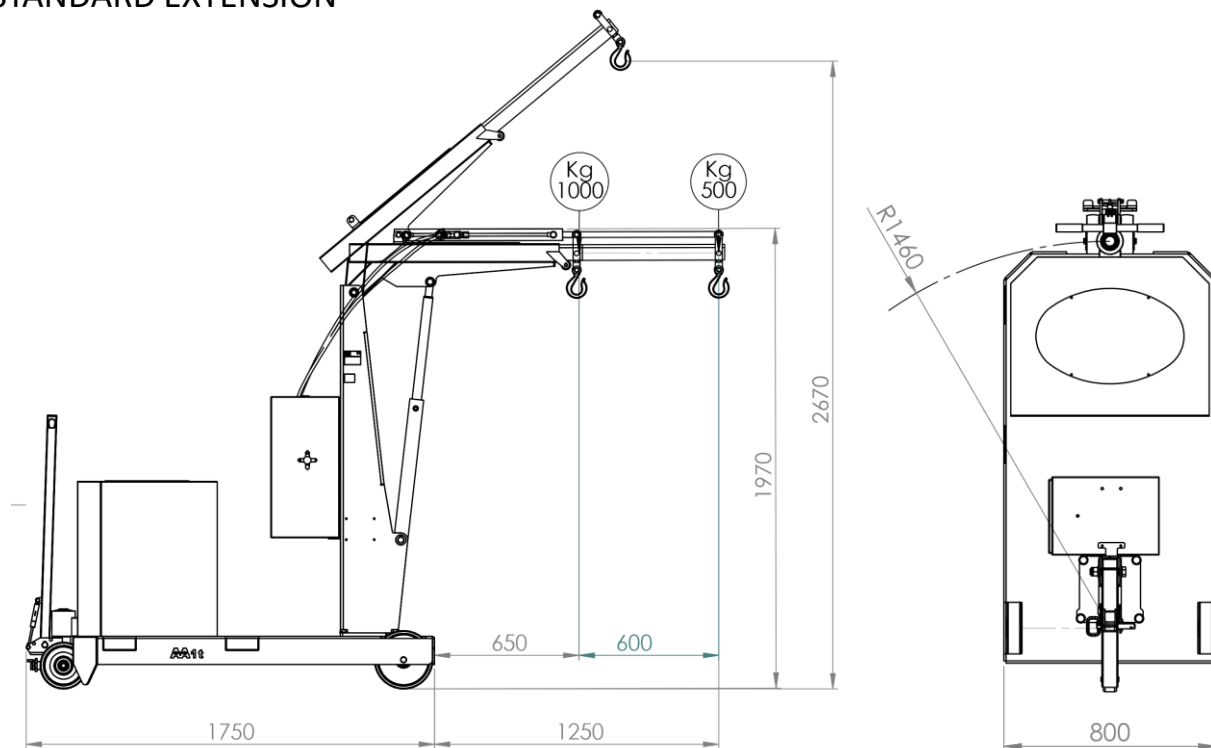

OPTIONAL EXTENSION

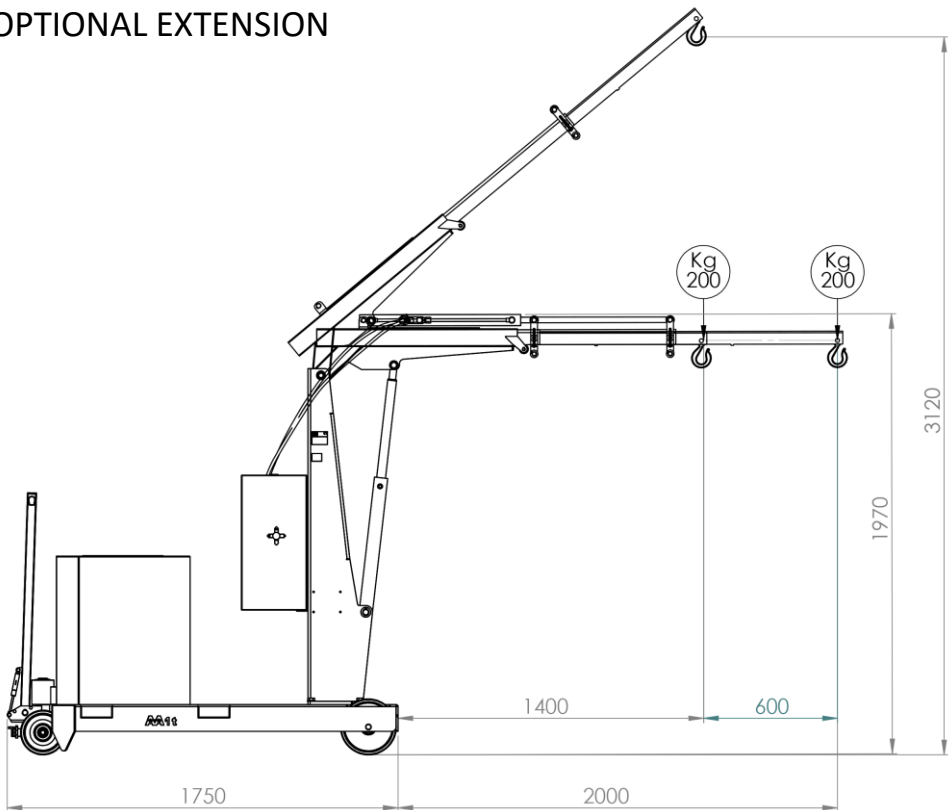

Powered
lift/lower and
powered
extend/retract jib
arm with
progressive
speed